## **ELEVATION CERTIFICATE**

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

	SECTION A PROPERTY INFORMATION								
BUILDING OWNER'S NAME	POLICY NUMBER								
STREET ADDRESS (Including AP	COMPANY NAIC NUMBER								
OTHER DESCRIPTION (Lot and	Block Numbers, etc.)			<i>ε</i>					
CITYPOSS				STATE	74957				
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION									
Provide the following from the proper FIRM (See Instructions):									
1. COMMUNITY NUMBER 060 17 9	2. PANEL NUMBER	3. SUFFIX	Feb 4, 1981	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)				
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7).									
	SECTION	ON C BUILDI	NG ELEVATION INFORM	MATION					
<ul> <li>2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of</li></ul>									
case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)  6. The elevation of the lowest grade immediately adjacent to the building is:									
Section B, Item 7).									
SECTION D COMMUNITY INFORMATION									
If the community official is not the "lowest floor" a floor" as defined by the c     Date of the start of const	s defined in the commodinance is:	nunity's floodpl	ain management ordinan NGVD (or other FIRM dati	ce, the elevation um-see Section	of the building's "lowest				

2 Fernhill Ave


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	2A BROWN	J	LICENSE NUMBER (or Affix Seal	)	
TITLE APCH	ITEGT		NY NAME		
ADDRESS 539	BRIDGEL	CITY	SAUSALITO	STATE	94965
SIGNATURE	m		DATE 2/16/9	9 PHONE 331	5353
Copies should be m	nade of this Certificate	for: 1) community	official, 2) insurance agent/com	pany, and 3) buil	ding owner.
COMMENTS:					
Openni	ngs were	provide	das per ord	inance.	RE

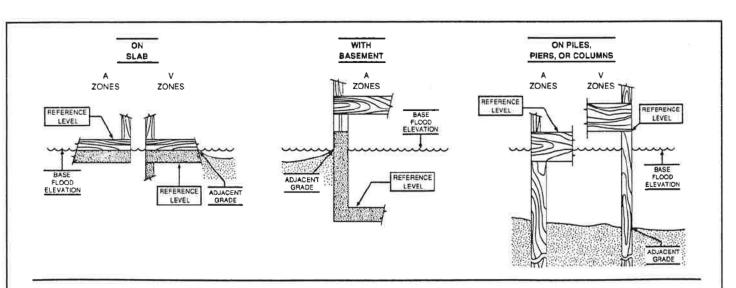

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.